





DIPSA

Technes S.r.l.

Via Buozzi, 51
40013 Castel Maggiore (BO)
Tel. +39 051 705388
Fax +39 051 705452
www.dipsatechnes.com

OLEODYNAMIC SCREW-SPIKING MACHINE

IOL

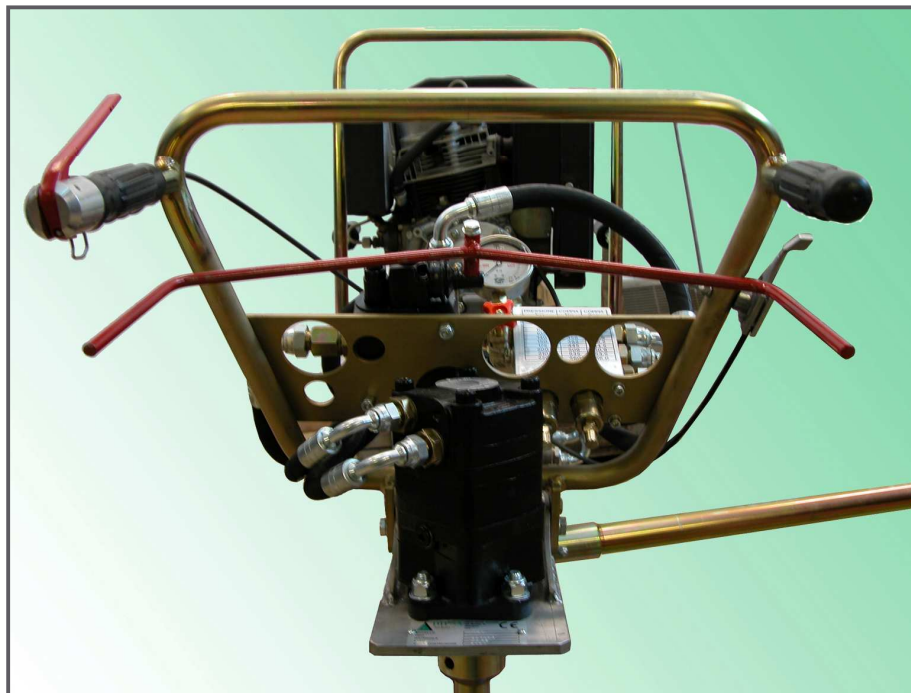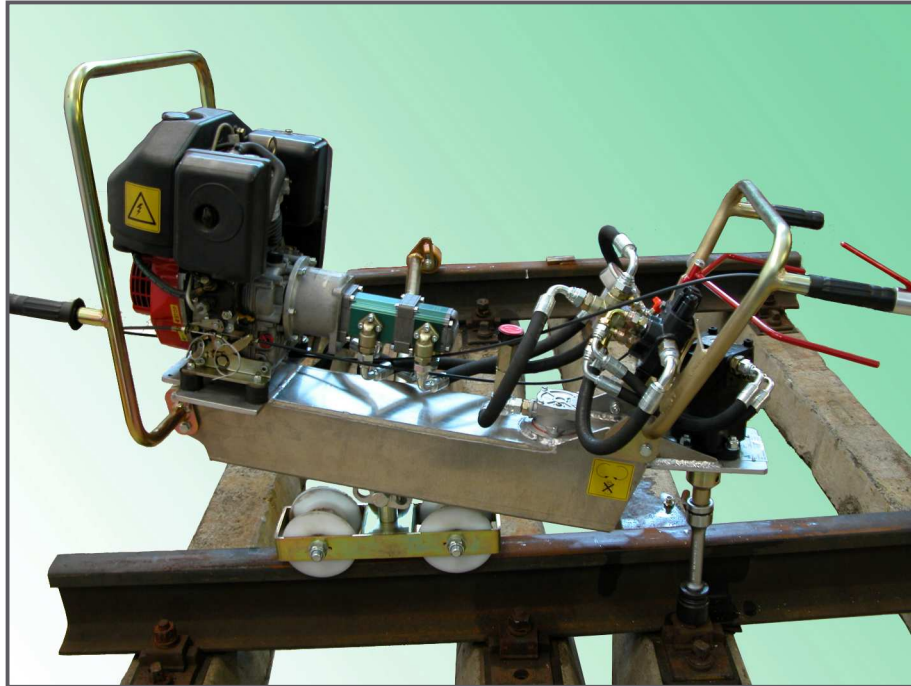

UNI EN ISO 9001:2000 CERTIFIED
COMPANY
Cert. N. 0011866





DIPSA

Technes S.r.l.

Via Buozzi, 51
40013 Castel Maggiore (BO)
Tel. +39 051 705388
Fax +39 051 705452
www.dipsatechnes.com

OLEODYNAMIC SCREW-SPIKING MACHINE

IOL

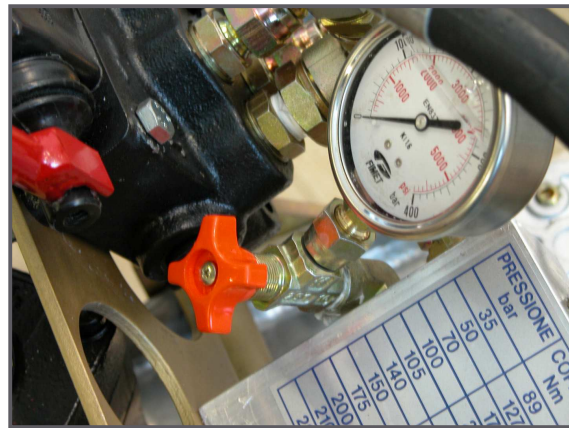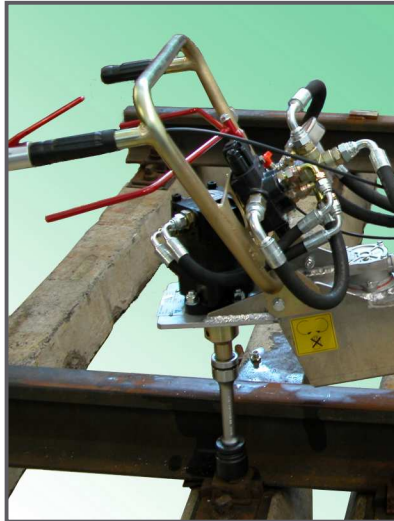

The machine is designed for the fitting on and removal of screw-on couplings. The adjustable torque wrench setting is indicated in the gauge. The adjustable tightening torque is shown on the appropriate pressure-gauge.

Engine is petroleum fuelled, pull startup and automatic rewinding, the silencers is protected by the accidentals contacts.

The aluminium frame machine , containing hydraulic oil is extremely light.

The gripping phase, with double rotation speed, is obtained by means of two oleodynamic pumps during the approaching phase and by one pump during the final climping phase .

The unscrewing phase, with double rotation speed, is obtained by means of one oleodynamic pump during the unlocking up phase and by two pumps during the loosening phase, in the course of maximum torque.

The hydraulic motor is operated by a highly dependable oleo-dynamic driving system that can be run without the operator having to let go of the handle.

The screw-spiking machine can be provided of lighting system to working inside tunnels and during the night.

Fast-release socket wrench is provided.

The sound intensity level is (in severity conditions) 84 db (with 4-strokes engine).

TECHNICAL SPECIFICATIONS

<i>Motor power:</i>	5,5 Hp
<i>Number of wrench revolutions:</i>	190 rpm
<i>Maximum tightening torque:</i>	520 Nm
<i>Weight:</i>	75 kg
<i>Weight with trolley:</i>	84 kg

Equipment: SOCKET EXAGON WRENCH 38, SOCKET RECTANGULAR WRENCH 21x24, SOCKET SQUARED WRENCH 24x24

Opzional: GROUND CLOTH for fixture protection.

The equipment keep to 626/94's and "DIRETTIVA MACCHINE"s specifications, therefore it's provided with CF checked and certified with own documentations.

The contents of the present documentation are not binding for DIPSA TECHNES s.r.l. who reserves the right to make modifications of any kind, at any time, without bringing this publication up-to-date.